

Dogbone®

Overview

Frequency Band

UHF 860 - 960 MHz

Chip

Impinj Monza R6-P

Antenna Dimensions

94 x 24 mm / 3.70 x 0.945 in

International Standard

ISO 18000-63, EPC Class 1 Gen 2

Industry Segments

Automotive
Industrial Applications
Sports and Events

Applications

Sports Timing
Glass and Automobile Tracking
Inventory

RoHS

EU Directive 2011/65/EU and
Directive (EU) 2015/863

REACH

Regulation (EC) No. 1907/2006



Excellent global performance even on difficult-to-tag materials

Our Dogbone® inlays and tags are designed for global supply chain, industrial, RTI and sports timing applications, and offer excellent performance in demanding environments and on different materials.

Dogbone® inlays and tags have good tolerance against the detuning effect of highly dielectric materials, providing effective global performance even on difficult-to-tag materials. The inlay is size optimized for 100 mm / 4 inch wide converted labels, and is available in dry, wet and paper tag delivery formats.


They are available with the Impinj Monza R6 and R6-P chips that come with an autotune feature, which helps the Dogbone® product to work at peak efficiency, even in rapidly changing environments. Dogbone® with the Monza R6 chip offers a unique TID and enables pre-serialized EPC. Inlays with Monza R6-P offer additional features such as add-on user memory and on-demand memory configuration as well as a kill function and easy access control to change tag information for store data, if required.

Our inlays and tags are compliant with ISO 9001:2015 Quality Management and ISO 14001:2015 Environmental Management, which ensure a reliable and state-of-the-art product that meets a variety of application needs, enhancing RFID usage for difficult-to-tag materials.


Technical features

Chip	Impinj Monza R6-P		
EPC and User Memory	128-bit / 96-bit and 32-bit / 64-bit		
TID Memory	96-bit / 48-bit unique serial number		
Product Code	3005071	3005072	3005073
Delivery Format	Dry inlay	Wet inlay	Label / sticker
Die-Cut Dimension	–	97 x 27 mm / 3.82 x 1.06 in	97 x 27 mm / 3.82 x 1.06 in
Inlay Substrate	PET	PET	PET
Face Sheet	Clear PET	Clear PET	Opaque Matt Paper 79
Standard Pitch	30 mm / 1.181 in	30 mm / 1.181 in	30 mm / 1.181 in
Web Width	97 mm / 3.82 in	100 mm / 4 in	100 mm / 4 in
Core Size	76 mm / 3 in	76 mm / 3 in	76 mm / 3 in
Quantity / Reel	10,000 pcs/reel	5,000 pcs/reel	3,000 pcs/reel 6,000 pcs/box
Operating Temperature	-40 °C to 85 °C / -40 °F to 185 °F		

Orientation sensitivity

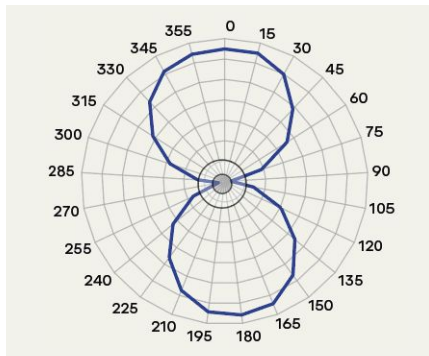

Read range

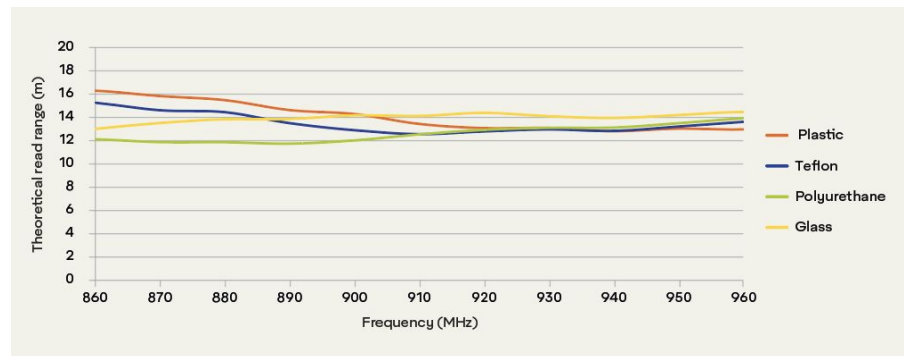

All graphs are indicative: performance in real life applications may vary.

Contact information

rfid.averydennison.com/contact
North America: +1-866-903-7343 (toll free US)
International: +1-678-617-2359

Connect with us on:



© 2021 Avery Dennison Corp. All rights reserved. 170 Monarch Lane, Miamisburg, OH 45342, USA Third party trademarks and/or trade names used herein are the property of their respective owner(s). Some of the trademarks appear for identification purposes only.

Warranty: Please refer to Avery Dennison standard terms and conditions: rfid.averydennison.com/termsandconditions

Care and handling: RFID inlays are sensitive to ESD. Observe standard industry practices relating to electronics / RFID to keep environmental impact and static charge to a minimum.

Applications: This product should be tested by the customer / user thoroughly under end use conditions to ensure the product meets the particular requirements. Avery Dennison does not represent that this product is fit for any particular purpose or use. Avery Dennison reserves the right to modify, change, supplement or discontinue product offerings at any time without notice. The information contained herein is believed to be reliable but Avery Dennison makes no representation concerning the accuracy or correctness of the data.

